

# Temposonics®

Magnetostrictive Linear Position Sensors

**DATA SHEET**

A-Series Linear Encoder



## BENEFITS OF MAGNETOSTRICTION

Temposonics® linear-position sensors use the time-based magnetostrictive position sensing principle developed by MTS Sensors. Within the sensing element, a sonic-strain pulse is induced in a specially designed magnetostrictive waveguide by the momentary interaction of two magnetic fields. One field comes from a moveable permanent magnet that passes along the outside of the sensor. The other field comes from an “interrogation” current pulse applied along the waveguide. The resulting strain pulse travels at sonic speed along the waveguide and is detected at the head of the sensing element. The position of the magnet is determined with high precision and speed by accurately measuring the elapsed time between the application of the interrogation pulse and the arrival of the resulting strain pulse with a high-speed counter. The elapsed time measurement is directly proportional to the position of the permanent magnet and is an absolute value. Therefore, the sensor's output signal corresponds to absolute position, instead of incremental, and never requires recalibration or re-homing after a power loss. Absolute, non-contact sensing eliminates wear, and guarantees the best durability and output repeatability.

## A-SERIES DUO LINEAR ENCODER

Robust, non-contact and wear free, the Temposonics® linear position transducers provide best durability and accurate position measurement solutions in harsh industrial environments. The position measurement accuracy is tightly controlled by the quality of the waveguide which is manufactured by MTS Sensors. The position magnet is mounted on the moving machine part and travels non-contact over the sensor rod with the built-in waveguide.

Temposonics® A-Series Duo Linear Encoder is a robust solution for combining absolute encoder feedback with an incremental encoder in a single sensor housing. With its easy installation and cabling, the A-Series is a cost-effective method to increase productivity.

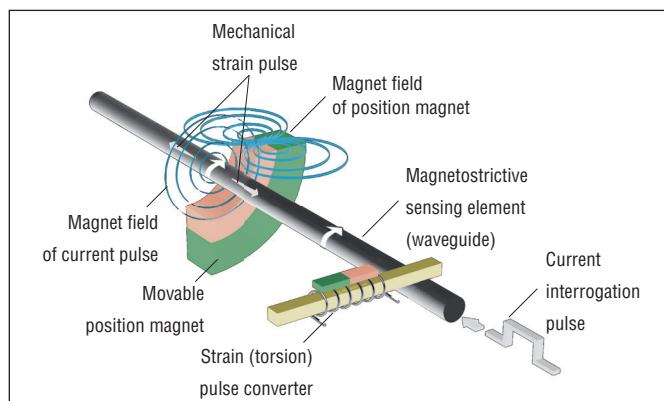


Fig. 1: Time-based Magnetostrictive position sensing principle



Fig. 2: A-Series Duo Linear Encoder

## TECHNICAL DATA

Input	
Measured value	Position
Stroke length	25...2000 mm
Output	
Linearity	≤ ±0.01% F.S. (minimum 40 μm)
Outputs:	
<b>Absolute</b>	<b>SSI: (Synchronous Serial Interface)</b> <b>Absolute calculation time: 1 ms</b> <b>Resolution: 1 μm</b>
<b>Incremental (analog)</b>	1 Vpp sin/cos Signal period: 20 μm or 50 μm Cutoff frequency: >100 kHz Measuring step: 1 μm
<b>Incremental (digital)</b>	TTL A/B quadrature Signal period: 1, 5, 10, 20, 50 μm Cutoff frequency: >250 kHz Measure step: 1 μm
Operating conditions	
Operating temperature	-40...+85 °C
Relative humidity	90 % no condensation
Temperature coefficient	< 15 ppm/°C
Ingress protection	IP67, when appropriate connectors are correctly fitted
Shock test	100 g, IEC standard EN 60068-2-27
Vibration test	15 g / 20...2000 Hz (resonance frequency excluded), IEC standard EN 60068-2-6
EMC test	Electromagnetic emission: IEC 61000-6-3:2011 Electromagnetic susceptibility: IEC 61000-6-2:2005 The sensors meets the requirements of the EC directives and is marked with <b>CE</b> .
Design, material	
Profile	Aluminum
Magnet	PA6 GF30
Electrical connection	
Connection type	8-pin (M12) male connector and 12-pin (M12) male connector
Operating voltage	24 VDC (+20% / -15%)
Current drain	< 110 mA (typical)

## TECHNICAL DRAWING

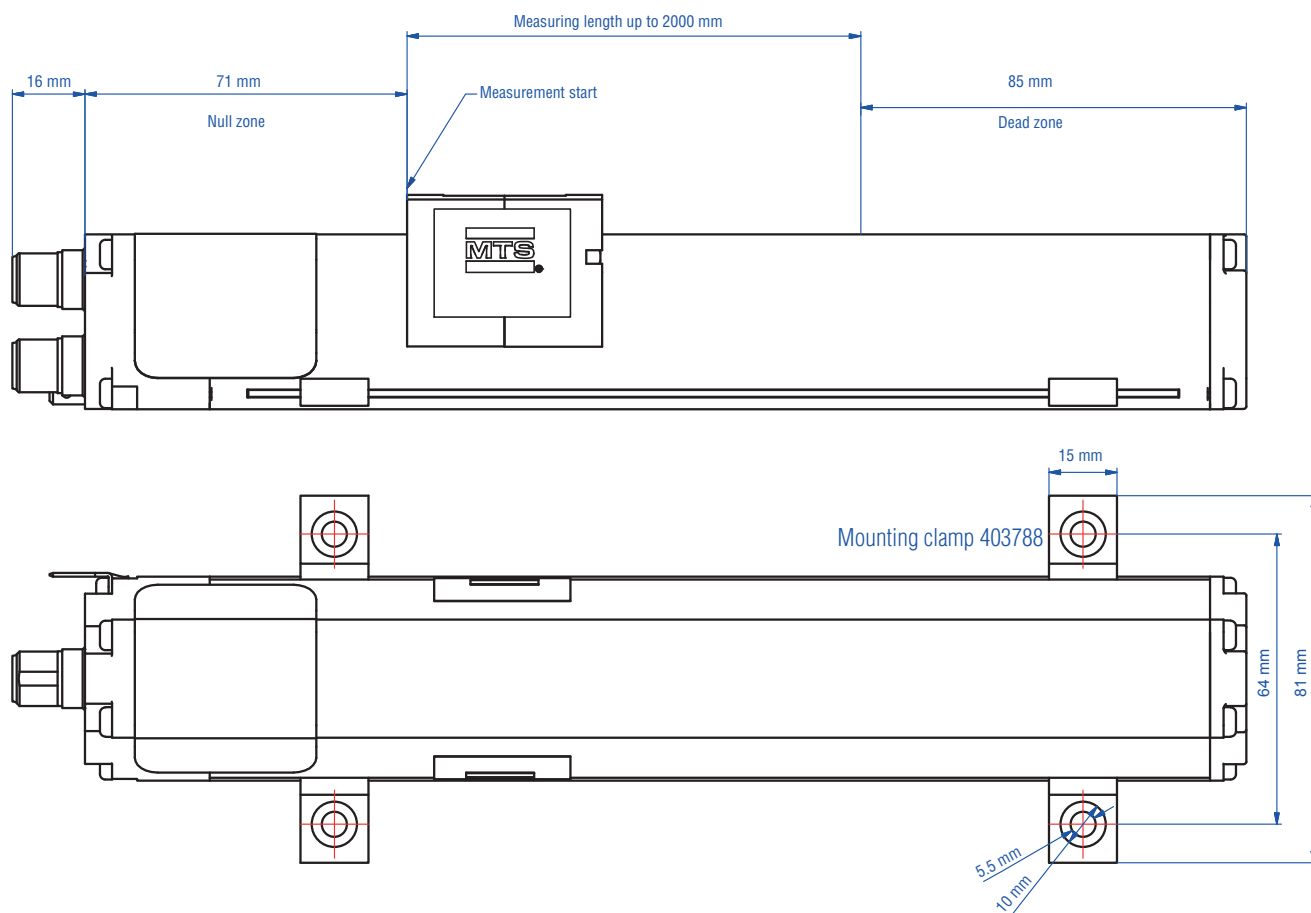


Fig. 3: Dual Channel linear encoder dimension reference

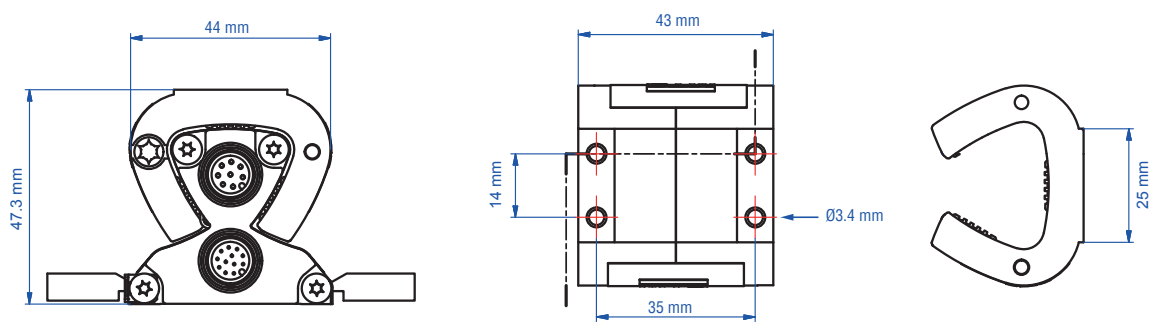




Fig. 4: Dual Channel linear encoder dimension reference

## CONNECTOR WIRING

### M12-8 pin connector

M12-8	Pin	Signal	Extension Cable Color
 (Mates with extension cable 531140)	3	Sin+	BN
	2	Sin-	BN/WH
	8	Cos+	GN
	5	Cos-	GN/WH
		Reserved	–
		Reserved	–
		Reserved	–
		Reserved	–

### M12-12 pin connector

M12-12	Pin	Signal	Extension Cable Color
 (Mates with extension cable 531139)	12	VCC 24 VDC	RD/BU
	11	Ground	GY/PK
	10	Apos	VT
	7	Aneg	BK
	8	Bpos	GY
	5	Bneg	PK
	6	DATA+	YE
	4	DATA-	GN
	1	CLOCK+	BN
	3	CLOCK-	WH
	2	INDEX+	BU
	9	INDEX-	RD

## INCREMENTAL QUADRATURE

The signal period is 1, 5, 10, 20, or 50 micrometers for 1× counting. Index is selectable by the user!

Due to the incremental nature of the output, the signal period is established after traveling the minimum defined distance for the selected signal period.

### Index

The index is gated to the leading signal edge. The index signal delay is < 600 ns from the leading edge. The length of the index pulse is one increment.

### Quadrature interface

Transmission standard	RS422 differential / incremental for A/B/Z
Amplitude of differential signals	5 V
Maximum operating speed	250 kHz
Frequency A/B- signal	variable, depending on operating speed
Length Z- pulse	1 increment

Fig. 5: Quadrature interface

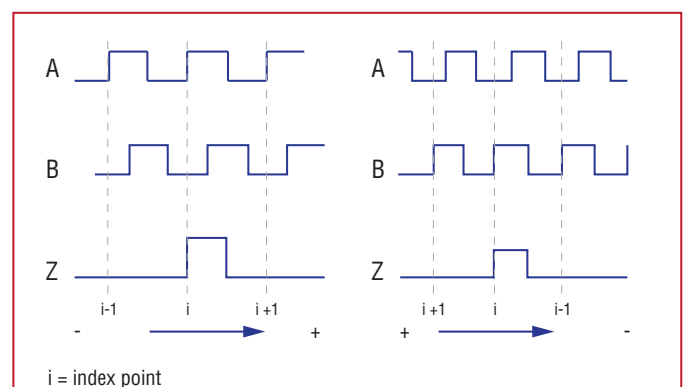


Fig. 6: Gated to Leading Signal Edge

## INCREMENTAL SIN/COS

The signal period is 20 or 50  $\mu\text{m}$ . Max operating frequency is 100 kHz.

Max Speed calculations: 100 kHz  $\times$  signal period in  $\mu\text{m}$ ,  
e.g. 20  $\mu\text{m}$  signal period equals 2000 mm/s max speed,  
50  $\mu\text{m}$  signal period equals 5000 mm/s max speed.

The amplitude for the differential sin/cos is 1 Vpp as depicted in Figure 7.

The signal period is depicted in Figure 8. Due to the incremental nature of the output, the signal period is established after traveling the minimum distance for the selected signal period.

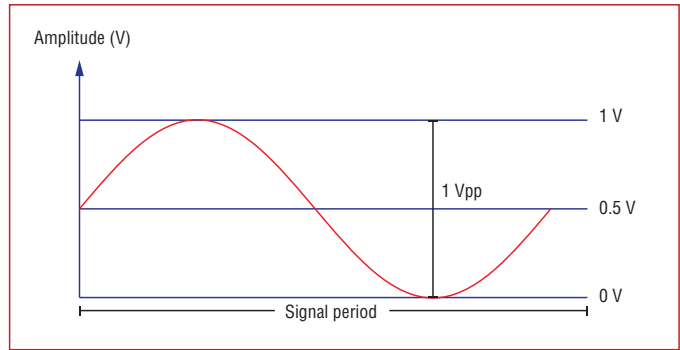


Fig. 7: Amplitude for Sin/Cos

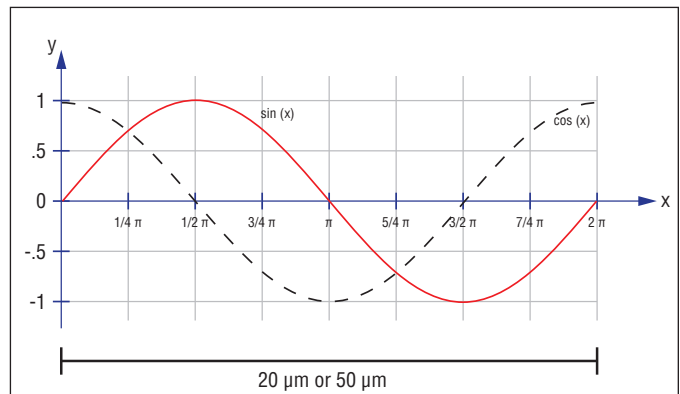


Fig. 8: Signal period

## ABSOLUTE SYNCHRONOUS SERIAL INTERFACE (SSI)

Temposonics® R-Series sensors with SSI fulfill all requirements of the SSI standard for an absolute encoder. The position value is encoded in a 24/25/26 bit code format and is transmitted at high speed in SSI standard format to the control device.

A clock pulse train from a controller is used to gate out sensor data. One bit of position data is transmitted to the controller for each clock pulse received by the sensor (see Figures 9 and 10). The absolute position data is continually updated by the sensor and converted by the shift register into serial information. (see Figure 11).

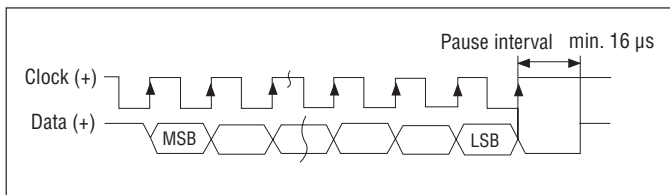


Fig. 9: Timing diagram

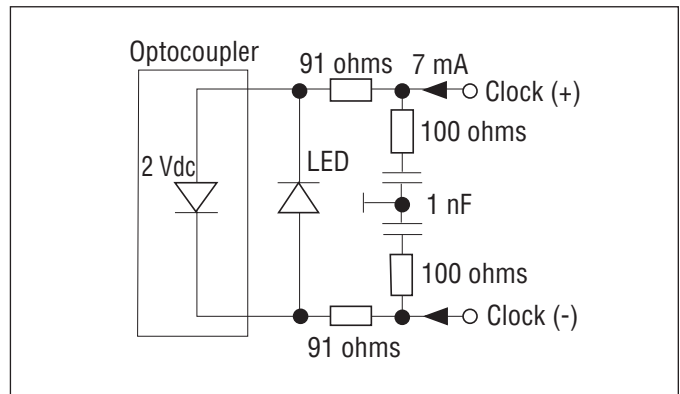


Fig. 10: Sensor input

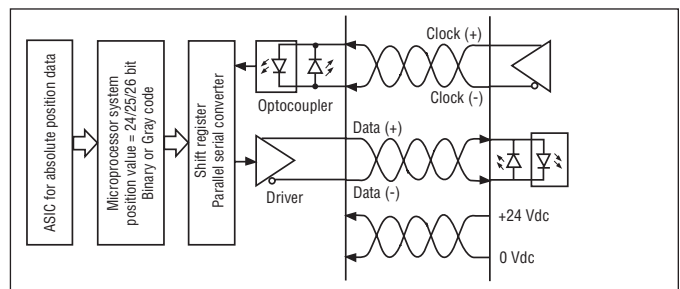


Fig. 11: Logic diagram

## MEASURING MODE

### ASYNCHRONOUS MEASURING MODE

For the SSI sensor, the position data is always communicated to the controller or PLC using the Synchronous Serial Interface format. When the SSI sensor is operated as fast as possible, i.e. in Asynchronous Measuring Mode, the position data is updated and stored inside the sensor as quickly as the sensor's measurement cycle will allow. The minimum time for the measurement cycle is determined by the sensor's overall stroke length.

The controller's loop time will determine when the sensor's stored data is collected. For this mode the controller loop time is not synchronized with the sensor's measurement cycle time. However, if it is always slower than the sensor's cycle time then there will always be new position data available in the sensor's shift register, waiting to be clocked out over the SSI interface.

As shown in Figure 12, although the sensor is updating the position data as fast as possible, the actual data values collected by the controller can have varying delay times. This is shown as the delays from when the magnet's position was captured, (at the instant the interrogation pulse had started the relevant measurement cycle), to when the data is delivered at the end of the controller loop cycle.

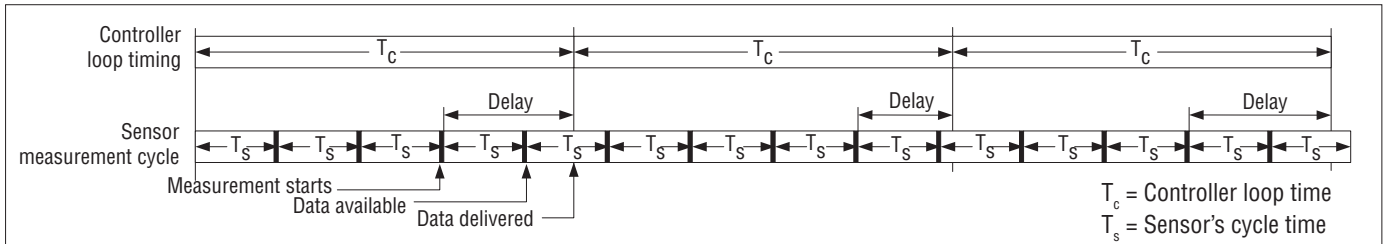


Fig. 12: Asynchronous SSI Interface

## A-SERIES SENSOR MOUNTING

### A-SERIES PROFILE-STYLE SENSOR MOUNTING FLEXIBLE INSTALLATION IN ANY POSITION!



**Notes:**



A-Series profile-style sensors include mounting clamp (part no. 403 788) for sensors stroke lengths up to 1250 mm.

Two additional mounting clamps are included for stroke lengths over 1250 mm and for each additional 500 mm, thereafter.

MTS Sensors recommends using M5 or 10-32 cap screws (*customer supplied*) at a maximum torque of 5 Nm when fastening mounting clamp.

## ACCESSORIES

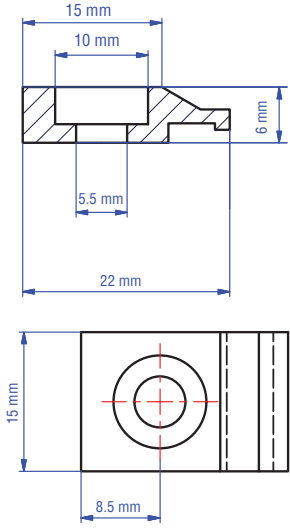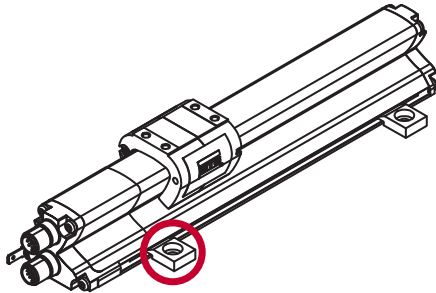Profile-Style sensor mounting and installation reference	Mounting method	Part number
	<p><b>Mounting clamp, standard</b> Profile-style sensor mounting for A-Series Material: Stainless steel 1.4305 / AISI 303</p> 	<p>403 788</p>

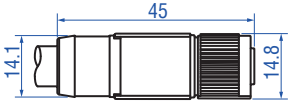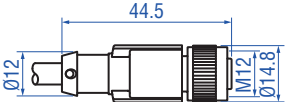Cable	
 <p><b>Cable, 12 pin</b> Part no. 531 139</p> <p>Dimensions: 12 × 0.14 mm<sup>2</sup> Cable Ø: 1 mm Material: PUR; black Operating temperature: -30...+80 °C Twisted pair shielded</p>	 <p><b>Cable, 8 pin</b> Part no. 531 140</p> <p>Dimensions: 4 × 2 × 0.14 mm<sup>2</sup> Cable Ø: 0.98 mm Material: PUR; water blue Operating temperature: -40...+80 °C Twisted pair shielded</p>



## ORDER CODE

<b>A</b>	<b>P</b>	<b>A</b>					<b>M</b>				<b>1</b>	<b>D</b>	<b>1</b>							
<b>a</b>	<b>b</b>							<b>c</b>	<b>d</b>	<b>e</b>		<b>f</b>	<b>g</b>	<b>h</b>	<b>i</b>	<b>j</b>	<b>k</b>			

<b>a</b>	<b>Form factor</b>
<b>A</b>	A-Series floating horseshoe style magnet (provided with sensor)

<b>b</b>	<b>Stroke length</b>
<b>X</b> <b>X</b> <b>X</b> <b>X</b>	25...2000 mm (in 5 mm steps)

<b>c</b>	<b>Connection type</b>
<b>D</b> <b>2</b> <b>0</b>	12-pin male M12 connector (A-coded) for TTL/SSI
<b>D</b> <b>2</b> <b>1</b>	12-pin male M12 connector (A-coded) for TTL/SSI and 8-pin male M12 connector (A-coded) for Sin/Cos

<b>d</b>	<b>Operating voltage</b>
<b>1</b>	+24 VDC, +20 %, -15 %

<b>e</b>	<b>Interface</b>
<b>D</b> <b>1</b>	SSI Interface

<b>f</b>	<b>Data length</b>
<b>1</b>	25 bit
<b>2</b>	24 bit
<b>3</b>	26 bit

<b>g</b>	<b>Output format</b>
<b>G</b>	Gray
<b>B</b>	Binary

<b>h</b>	<b>Absolut channel resolution</b>
<b>1</b>	0.005 mm
<b>2</b>	0.01 mm
<b>3</b>	0.05 mm
<b>4</b>	0.1 mm
<b>5</b>	0.02 mm
<b>6</b>	0.01 mm
<b>8</b>	0.001 mm

<b>i</b>	<b>Direction</b>
<b>0</b>	forward-acting, async mode
<b>1</b>	reverse-acting, async mode

<b>j</b>	<b>Incremental output</b>
<b>1</b>	Sin/Cos, 1 Vpp
<b>2</b>	TTL (A/B Quadrature)

<b>k</b>	<b>Incremental signal period</b>
<b>1</b>	0.005 mm (TTL only)
<b>2</b>	0.01 mm (TTL only)
<b>3</b>	0.05 mm (Sin/Cos + TTL only)
<b>5</b>	0.02 mm (Sin/Cos + TTL only)
<b>8</b>	0.001 mm (TTL only)

## STANDARD STROKE LENGTH

Stroke length	Ordering steps
< 500 mm	5 mm
500...750 mm	10 mm
750...1000 mm	25 mm
1000...2500 mm	50 mm
2500...≤ 3250 mm	100 mm

## DELIVERY



Sensor, Position magnet,  
2 mounting clamps,  
2 additional mounting clamps are included for  
stroke lengths over 1250 mm  
and for each additional 500 mm

Accessories have to be ordered separately.

**Document Part Number:**

551460 Revision A (EU.EN) 07/2014

**LOCATIONS**

**GERMANY**

**MTS Sensor Technologie GmbH & Co. KG**  
Auf dem Schüffel 9  
58513 Lüdenscheid, Germany  
Tel. +49 2351 9587-0  
Fax +49 2351 56491  
info.de@mtssensors.com  
www.mtssensors.com

**USA**

**MTS Systems Corporation Sensors Division**  
3001 Sheldon Drive  
Cary, N.C. 27513, USA  
Tel. +1 919 677-0100  
Fax +1 919 677-0200  
info.us@mtssensors.com  
www.mtssensors.com

**JAPAN**

**MTS Sensors Technology Corp.**  
737 Aihara-machi,  
Machida-shi,  
Tokyo 194-0211, Japan  
Tel. +81 42 775-3838  
Fax +81 42 775-5512  
info.jp@mtssensors.com  
www.mtssensors.com

**FRANCE**

**MTS Systems SAS**  
Zone EUROPARC Bâtiment EXA 16  
16/18, rue Eugène Dupuis  
94046 Creteil, France  
Tel. +33 1 58 4390-28  
Fax +33 1 58 4390-03  
info.fr@mtssensors.com  
www.mtssensors.com

**ITALY**

**MTS Systems Srl.Sensor Division**  
Via Diaz,4  
25050 Provaglio d'Iseo (BS), Italy  
Tel. +39 030 988 3819  
Fax +39 030 982 3359  
info.it@mtssensors.com  
www.mtssensors.com

**CHINA**

**MTS Sensors**  
Room 504, Huajing Commercial Center,  
No. 188, North Qinzhou Road  
200233 Shanghai, China  
Tel. +86 21 6485 5800  
Fax +86 21 6495 6329  
info.cn@mtssensors.com  
www.mtssensors.com

**LEGAL NOTICES**

MTS and Temposonics® are registered trademarks of MTS Systems Corporation. All other trademarks are the property of their respective owners. Printed in Germany. Copyright © 2014 MTS Sensor Technologie GmbH & Co. KG. Alterations reserved. All rights reserved in all media. No license of any intellectual property rights is granted. The information is subject to change without notice and replaces all data sheets previously supplied. The availability of components on the market is subject to considerable fluctuation and to accelerated technical progress. Therefore we reserve the right to alter certain components of our products depending on their availability. In the event that product approbations or other circumstances related to your application do not allow a change in components, a continuous supply with unaltered components must be agreed by specific contract.

**ISO 9001**  
CERTIFIED



Reg.-No. 003095-011