

IXARC Incremental Encoder

UTD-IPH00-XXXXX-M100-PRL



Interface

| | |
|-----------------------|--|
| Interface | Programmable Incremental |
| Programming Functions | PPR (1-16384), Output, Counting Direction |
| Configuration Tool | UBIFAST Configuration Tool (Version \geq 1.6.10) |

Outputs

| | |
|---|--|
| Output Driver | Push-Pull (HTL) |
| Output Voltage High Level Push-Pull (HTL) | > 4 V @ 4.75-9 V Supply Voltage > V-3 V @ 9-30 V Supply Voltage |
| Output Voltage Low Level Push-Pull (HTL) | < 0.5 V |
| Output Voltage High Level RS422 (TTL) | > 4 V |
| Output Voltage Low Level RS422 (TTL) | < 0.5 V |
| Maximum Frequency Response | 1 MHz |
| Maximum Switching Current | 50 mA per Channel |

Electrical Data

| | |
|-----------------------------|--|
| Supply Voltage | 4.75 - 30 VDC |
| Current Consumption | \leq 60 mA @ 5V DC, \leq 30 mA @ 10V DC, \leq 25 mA @ 24V DC |
| Power Consumption | \leq 1.0 W |
| Start-Up Time | < 1 s |
| Min. Load Resistance | 120 Ω |
| Reverse Polarity Protection | Yes |

Data Sheet

Printed at 24-11-2023 09:11



| | |
|---------------------------|-------------------|
| Short Circuit Protection | Yes |
| EMC: Emitted Interference | DIN EN 61000-6-4 |
| EMC: Noise Immunity | DIN EN 61000-6-2 |
| MTTF | 280 years @ 40 °C |

Sensor

| | |
|----------------|---|
| Technology | Magnetic |
| Accuracy (INL) | $\pm 0.0878^\circ$ (≤ 12 bit) |
| Duty Cycle | $180^\circ \pm 12^\circ$ (Speed > 100RPM) |
| Phase Angle | $90^\circ \pm 6^\circ$ (Speed > 100RPM) |

Environmental Specifications

| | |
|----------------------------|------------------------------------|
| Protection Class (Shaft) | IP65 |
| Protection Class (Housing) | IP65 |
| Operating Temperature | -40 °C (-40 °F) - +85 °C (+185 °F) |
| Humidity | 98% RH, no condensation |

Mechanical Data

Mechanical Data

| | |
|-----------------------------------|--|
| Housing Material | Steel |
| Housing Coating | Cathodic corrosion protection (>720 hrs salt spray resistance) |
| Flange Type | Clamp, \varnothing 58 mm (M) |
| Flange Material | Aluminum |
| Shaft Type | Solid, Single Flat, Length = 20 mm |
| Shaft Diameter | \varnothing 10 mm (0.39") |
| Shaft Material | Stainless Steel V2A (1.4305, 303) |
| Max. Shaft Load | Axial 40 N, Radial 110 N |
| Rotor Inertia | ≤ 30 gcm ² [≤ 0.17 oz-in ²] |
| Friction Torque | ≤ 3 Ncm @ 20 °C (4.2 oz-in @ 68 °F) |
| Max. Permissible Mechanical Speed | ≤ 12000 1/min |
| Shock Resistance | ≤ 100 g (half sine 6 ms, EN 60068-2-27) |
| Permanent Shock Resistance | ≤ 10 g (half sine 16 ms, EN 60068-2-29) |
| Vibration Resistance | ≤ 10 g (10 Hz - 1000 Hz, EN 60068-2-6) |
| Length | 92 mm (3.62") |
| Weight | 215 g (0.47 lb) |

Data Sheet

Printed at 24-11-2023 09:11

Minimum Mechanical Lifetime
(10^8 revolutions with Fa/Fr)

430 (20 N / 40 N), 150 (40 N / 60 N), 100 (40 N / 80 N), 55 (40 N / 110 N)

Electrical Connection

Connection Orientation

Radial

Connector

M23, Male, 12 pin, CCW / left

Certification


Approval

CE + cULus

Product Life Cycle

Product Life Cycle

New

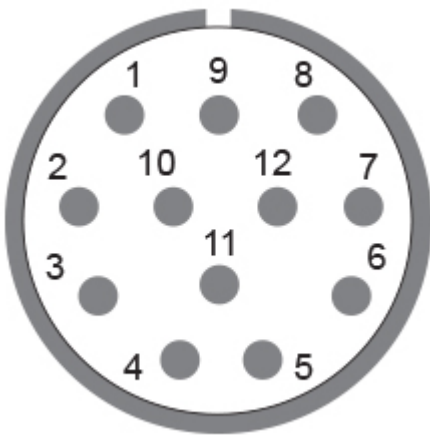

Connection Plan


| SIGNAL | PIN NUMBER |
|--------------|-------------------|
| Power Supply | 12 |
| GND | 10 |
| A | 5 |
| /A | 6 |
| B | 8 |
| /B | 1 |
| Z | 3 |
| /Z | 4 |
| Shielding | Connector housing |

Connector-View on Encoder

Data Sheet

Printed at 24-11-2023 09:11

Pulse Diagram

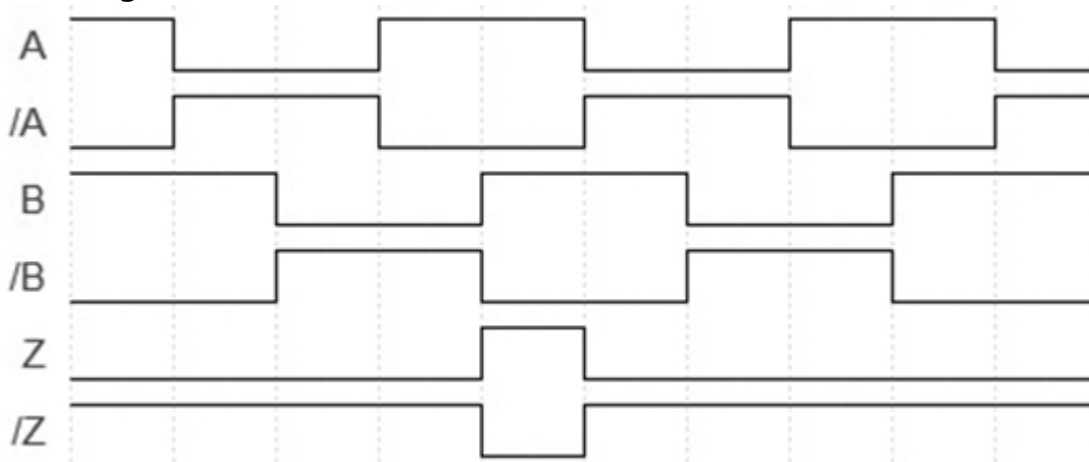

Rotation Clockwise (seen on shaft)

Dimensional Drawing

Accessories

Configuration/Programming Tools

UBIFAST Configuration Tool

Connectors & Cables

10m PVC Cable, 12pin, Clockwise, f

15m PVC Cable, 12pin, Clockwise, f

1m PVC Cable, 12pin, Clockwise, f

20m PVC Cable, 12pin, Clockwise, f

5m PVC Cable, 12pin, Clockwise, f

30m PVC Cable, 12pin, Clockwise, f

2m PVC Cable, 12pin, Clockwise, f

M23, 12pin Clockwise, Female

More

Couplings

Coupling Disc Type-10-12

Coupling Bellow Type-10-10

Coupling Bellow Type-06-10

Coupling Bellow Type-08-10

Coupling Bellow Type-10-12

Coupling Bellow Type-10-(1/4")

Coupling Bellow Type-10-(3/8")

Coupling Jaw Type-06-10

Coupling Jaw Type-08-10

Data Sheet

Printed at 24-11-2023 09:11



Coupling Jaw Type-10-12

Coupling Jaw Type-10-(1/4")

Coupling Jaw Type-10-(3/8")

Coupling Jaw Type-10-10

Coupling Disc Type-06-10

Coupling Disc Type-10-10

More

Measuring Wheels

Measuring Wheels 200mm-Knurled Alu Surface

Measuring Wheels 200mm-Smooth PUR Surface

Measuring Wheels 200mm-Studded PUR Surface

Measuring Wheels 200mm-Corrugated PUR Surface

Measuring Wheels 500mm-Knurling Alu Surface

Measuring Wheels 500mm-Smooth PUR Surface

Measuring Wheels 500mm-Studded PUR Surface

Measuring Wheels 500mm-Corrugated PUR Surface

More

Adapter Flanges

Mounting Bracket for Clamping Flange w/ fixtures

L Mounting Bracket w/ screws

Mounting Bracket Spring Loaded f. Clamping Flange

Spring Loaded Pivot Arm 58mm

More

Displays

AP20-00 Counter

AP20-D0 Counter (4 dig. o/p)

AP20-0A Counter (analog o/p)

AP20-DA Counter (4 dig. + analog o/p)

DiMod Counter (Relay o/p)

More

Clamping Rings

Clamp Disc w/ Eccentric Hole-4pcs

Clamp Disc w/ Centred Hole-4pcs

Got questions? Need an individual solution? We are here to help!



Contact Us

If the drawings are not available please refer to the "Download" section. The picture and drawing are for general presentation purposes only. All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.